

KU-BAND STANDARD GAIN HORN ANTENNA

12.4 GHz TO 18.0 GHz


SGH-WR62

KEY FEATURES

- Ku-band standard gain horn antenna with symmetric E-plane and H-plane radiation patterns
- Durable all-metal body (aluminum)
- VSWR below 1.5:1 (typically below 1.25:1) with gain up to 16 dBi
- Professionally designed and hand-tested by engineers in the United States

DESIGN SPECIFICATIONS

- Design: Pyramidal Waveguide Horn
- Operating Frequency: 12.4 GHz to 18.0 GHz
- Polarization: Linear (horizontal/vertical based on orientation)
- Waveguide Size: WR-62
- Flange: UG-1665/U
- Body Material and Plating: Aluminum Alloy, Paint
- Length: 1.3 in [33 mm]
- Width: 1.7 in [44 mm]
- Height: 3.3 in [84 mm]

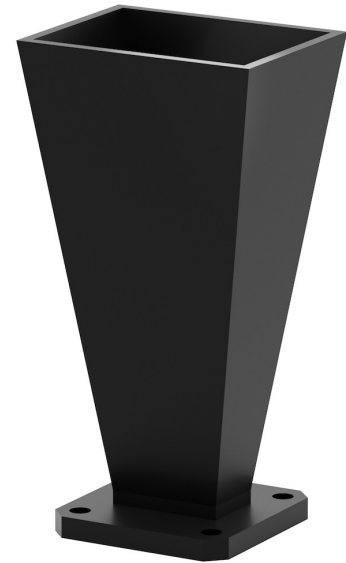


SGH-WR62

PERFORMANCE SPECIFICATIONS


Parameter		Frequency	Min.	Typ.	Max.	Unit
VSWR		12.4 GHz – 18.0 GHz	–	1.25	1.75	–
Gain		12.4 GHz – 18.0 GHz	13.0	15.0	16.5	dBi
HPBW	E-Plane	12.4 GHz – 18.0 GHz	27	34	42	deg.
	H-Plane		27	34	40	
Impedance		–	50			Ω
Connector		–	WR-62 UG-1665/U			–

TYPICAL PERFORMANCE

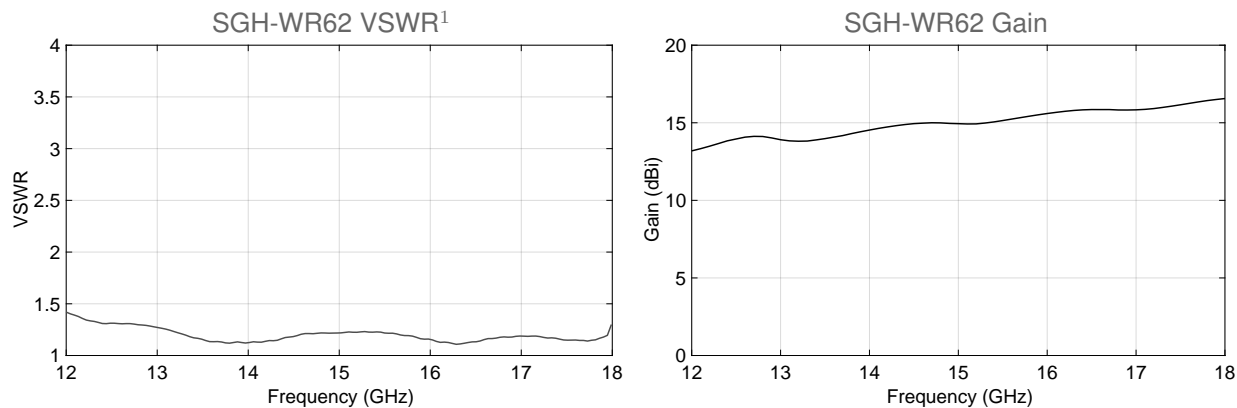

¹ Measured using an AntenX SMA-WR62 coax to waveguide adapter

SGH-WR62 Normalized Radiation Patterns

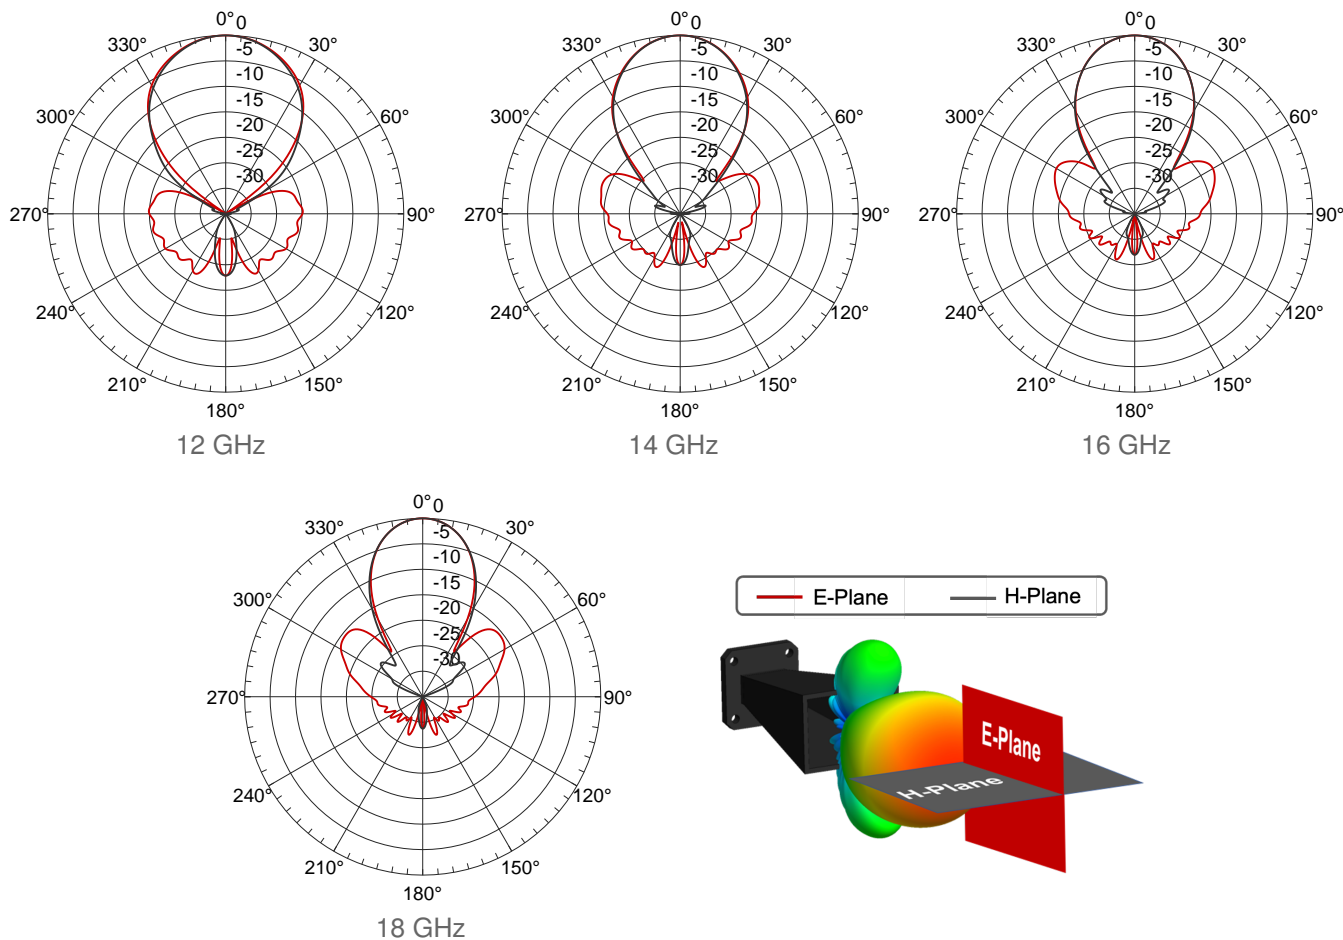


KU-BAND STANDARD GAIN HORN ANTENNA

12.4 GHz TO 18.0 GHz

SGH-WR62

CAD DRAWING

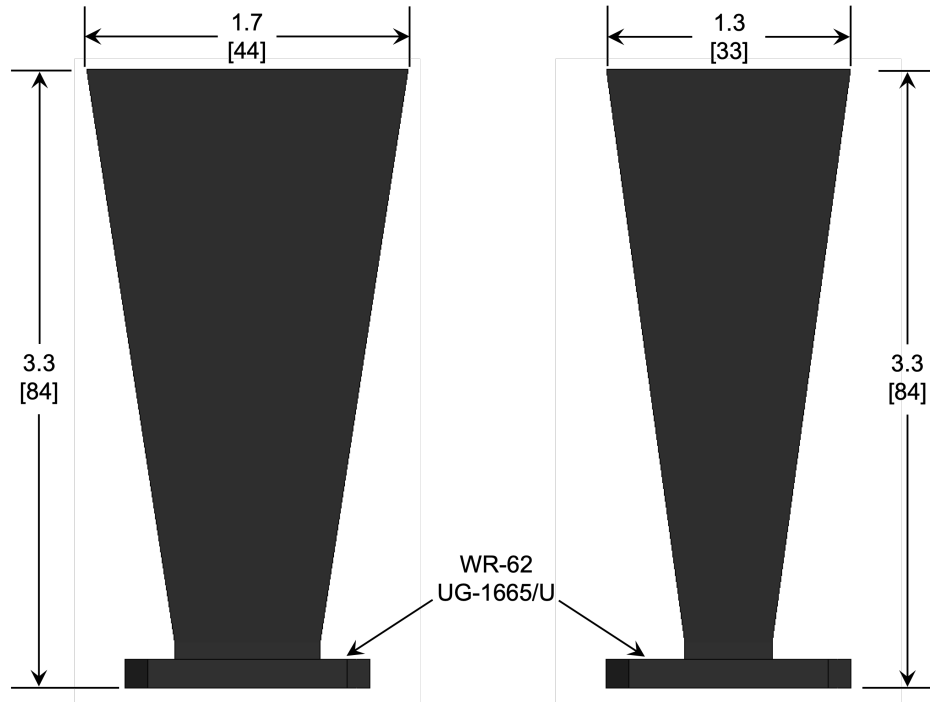

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL
2. DIMENSIONS ARE IN INCHES [mm]
3. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME